

STG/STG-V


Electronic/Glass Fuses

MIDGET, PC MOUNT & MINIATURE FUSES

MF

STG/STG-V

- Glass body
- Time-delay
- 1-1/2" Axial leads optional

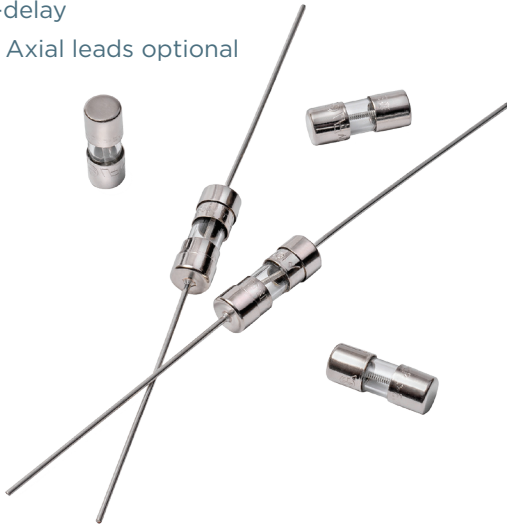

1/2A through 7A, 350VAC, UL and CSA Recognized



STANDARD FUSE AMPERE RATINGS

Catalog Number	Axial Lead Cat. No	Ampere Rating	Volts	I.R.	Size
STG1/2	STG-V1/2	1/2A	350V	1	B
STG3/4	STG-V3/4	3/4A	350V	1	B
STG1	STG-V1	1A	350V	1	B
STG1-1/4	STG-V1-1/4	1-1/4A	350V	1	B
STG1-1/2	STG-V1-1/2	1-1/2A	350V	1	B
STG2	STG-V2	2A	350V	1	B
STG2-1/2	STG-V2-1/2	2-1/2A	350V	1	B
STG3	STG-V3	3A	350V	1	B
STG3-1/2	STG-V3-1/2	3-1/2A	350V	1	B
STG4	STG-V4	4A	350V	1	B
STG5	STG-V5	5A	350V	1	B
STG7	STG-V7	7A	350V	1	B

1. 350VAC @ 100A I.R./140VDC @ 150A I.R./125VAC @ 10kA I.R.

Size	Non-lead		With leads		
	A	B	A	B (Insulated Caps)	C
Length (mm)	14.5 +/- 0.75	13.8 +/- 0.5	15.2 +/- 0.75	18 +/- 0.2	14.48
Diameter (mm)	4.6 +/- 0.1	5.1 +/- 0.1	5.5 +/- 0.2	6.2 +/- 0.2	4.7