



24393

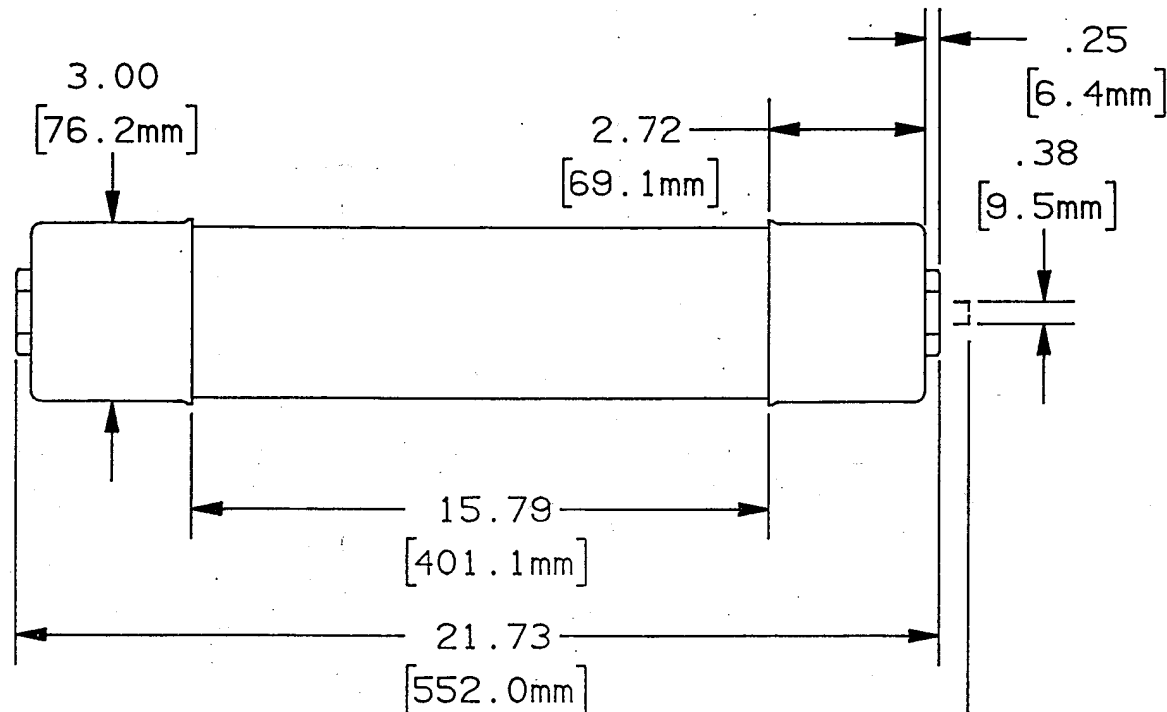

SURFACE "A" →

INDICATOR FLUSH WITH SURFACE "A" BEFORE FUSE OPENS.
 INDICATOR EXTENDS .50in(12.7mm) AFTER FUSE OPENS.
 INDICATOR EXERTS 2 LB FORCE AT END OF TRAVEL

| RATING | CATALOG NO. |
|--------|-----------------|
| 65E | A155F1D0R0-65E |
| 80E | A155F1D0R0-80E |
| 100E | A155F1D0R0-100E |

GOULD 374 MERRIMAC STREET
NEWBURYPORT, MA 01950

| | |
|--|--|
| PRODUCT MANAGER SIGN: <i>H. C. Cline</i> DATE: 5/18/93 | DESIGN ENGINEER SIGN: <i>L. O'Shella</i> DATE: 1/29/93 |
|--|--|

MEDIUM VOLTAGE AMP-TRAP
E-RATED GENERAL PURPOSE
CURRENT LIMITING FUSE
CS-3 SERIES, 65E TO 100E, 15.5KV MAX

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION

24393