
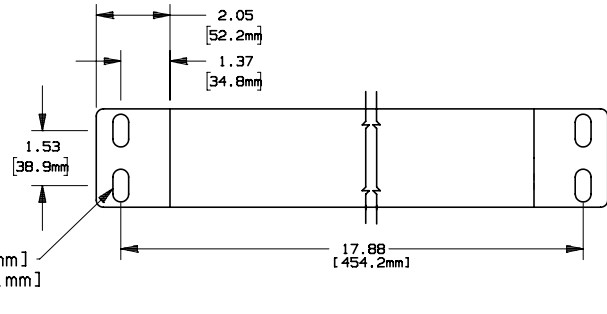



REV	DATE	ECO	DESCRIPTION	BY	CK	APP
A	7/1/11	NA	REDRAWN, UPDATED TO CURRENT STANDARDS	GBR		(SEE ECO)

SURFACE "A" →

INDICATOR FLUSH WITH SURFACE "A" BEFORE FUSE OPENS.  
 INDICATOR EXTENDS .50in(12.7mm) AFTER FUSE OPENS.  
 INDICATOR EXERTS 2 LBS FORCE AT END OF TRAVEL

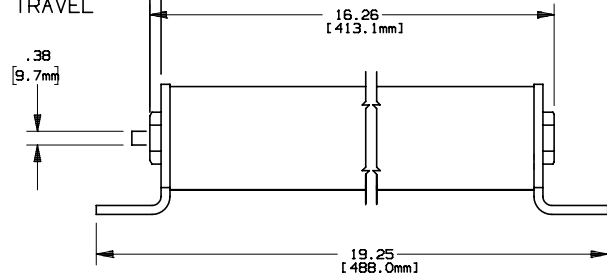

RATING	CATALOG NUMBER
2R	A072B1DARO-2R
3R	A072B1DARO-3R
4R	A072B1DARO-4R
5R	A072B1DARO-5R
6R	A072B1DARO-6R
9R	A072B1DARO-9R
12R	A072B1DARO-12R



MERSEN USA NEWBURYPORT-MA, LLC  
 374 MERRIMAC STREET  
 NEWBURYPORT, MA 01950

MEDIUM VOLTAGE AMP-TRAP  
 R-RATED MOTOR CIRCUIT BACKUP  
 CURRENT LIMITING FUSE

OUTLINE DIMENSIONS  
 NOT TO BE USED FOR PRODUCTION

24398

BOLT-IN SERIES, 2R-12R, 7.2kV MAX

PRODUCT MANAGER  
 SIGN:  
 DATE:

DESIGN ENGINEER  
 SIGN:  
 DATE: