
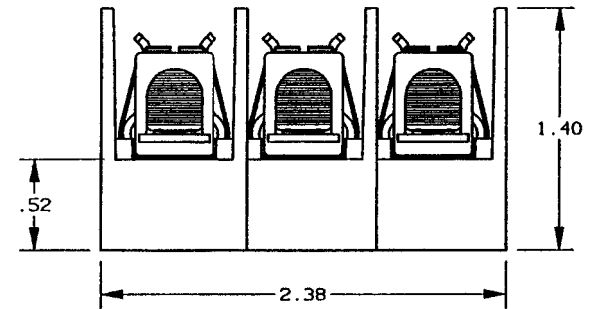
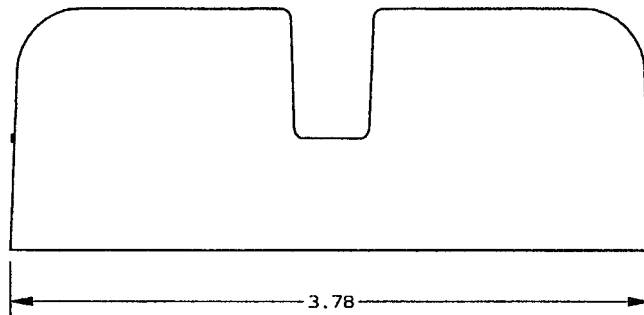


| REV | DATE | ECO | DESCRIPTION | BY | CK | APP |
|-----|---------|-----|-----------------|-----|-----|-----|
| - | 4-15-99 | N/A | INITIAL RELEASE | LDB | N/A | N/A |

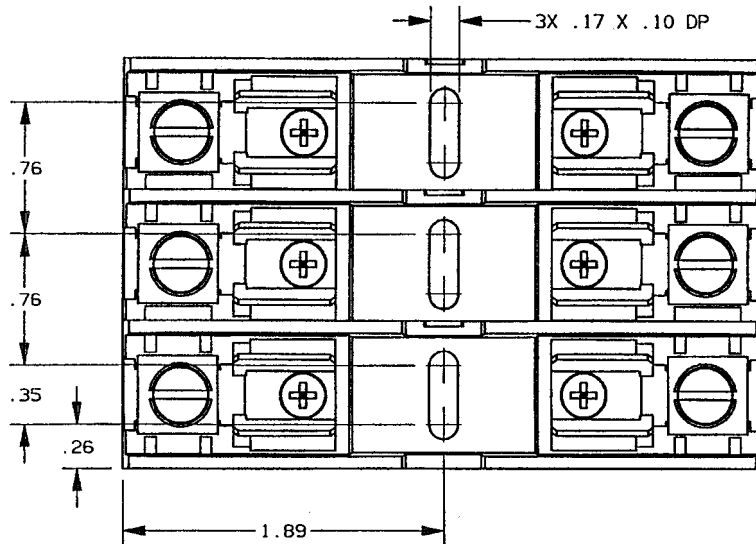

NOTES:

1. MATERIAL COMPOSITION AND RATING:
BASE - THERMOPLASTIC 125°C RTI
2. ALL TOLERANCES ±.010 UNLESS OTHERWISE NOTED

| P/N | CONN TYPE | RMS SYM RATING | TORQUE (IN-LBS) | WIRE | | U/L | | CSA |
|--------|-----------|----------------|-----------------|-------|-------|----------|-----------|------------|
| | | | | °C | TYPE | FILE NO. | GUIDE NO. | REPORT NO. |
| 40608G | AL BOX | 100K | 45 | 60/75 | CU-AL | E52283 | 1ZLT | LR32169 |

GOULD 374 MERRIMAC STREET
NEWBURYPORT, MA 01950

| | |
|--|--|
| PRODUCT MANAGER SIGN: <i>Nick Dula</i> DATE: 5-10-99 | DESIGN ENGINEER SIGN: <i>Shalott</i> DATE: 5/10/99 |
|--|--|

FUSE BLOCK, 480V-60A, 3 POLE
CLASS G

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION

700439